
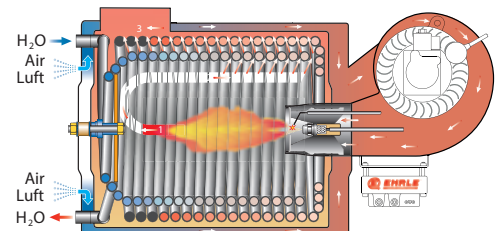


High pressure cleaner

Hot water, mobile, oil heated - series Etronic II
HD823

Tel: 01748 826 200

Email: sales@tandjcleaningequipment.co.uk

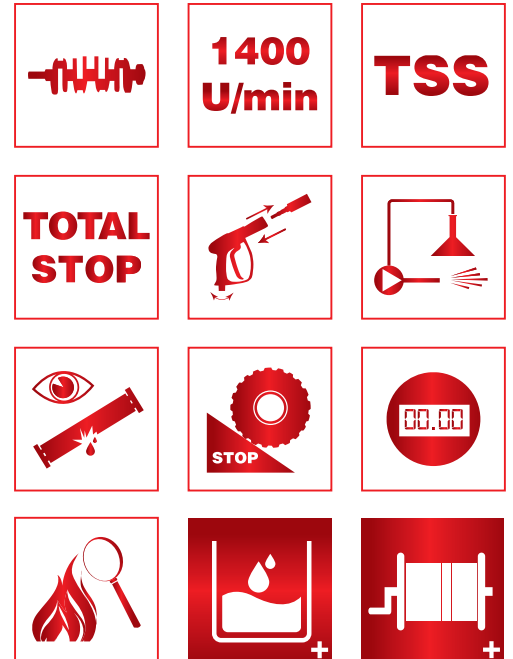

Type		HD823-Standard	HD823-Premium
Voltage	1/ 230V / 50Hz	▶ Etronic II - Controls	▶ Etronic II - Controls
Operating pressure	30-140bar/ 3-14MPa	▶ 10m HP-Hose DN08 - 315bar	▶ Hose-Reel
Max. pressure	165bar/ 16,5MPa	▶ Trigger-Gun with swivel	▶ 20m HP-Hose DN08 - 315bar
Discharge capacity	300 - 720l/h	▶ Spray-Lance 900mm c/w Nozzle- Protection	▶ Trigger-Gun with swivel
Nozzle size	045	▶ Stainless-Steel Jet-Nozzle 25°	▶ Spray-Lance 900mm c/w Nozzle- Protection
Hot water capacity	30 - 98°C (150°C)	▶ Water-Supply separation acc. water reg.	▶ Stainless-Steel Jet-Nozzle 25°
Pump speed	1400rpm	▶ Chemical supply in high-pressure Jet c/w Metering-valve	▶ Spray-Lance 900mm c/w Rotary-Nozzle
Connected load	3,4kW / 15A		▶ Water-Supply separation acc. water reg.
Electrical protection	16A slow-blowing		▶ Chemical supply in high-pressure Jet c/w Metering-valve
Weight net / with package		158 kg / 179 kg	167 kg / 188 kg
Dimensions device / with package (LxWxH)		1070 x 735 x 1020 mm / 1160 x 770 x 960 mm	1070 x 735 x 1310 mm / 1160 x 770 x 1350 mm
<p>Robust, corrosion-resistant, self-supporting device chassis, impact-resistant device-cover made of ABS, triplex-piston pump with nickel plated, high-performance ceramic piston, stainless-steel valves, leakage-return, Etronic II - controls: (Start-stop system with switch-off delay, total-switch-off after 20min OPH-counter with service information, low-water cut-off, low-fuel cut-off, optical flame monitoring with photoelectric cell and fault indicator-light, steam-stage) 2 motors system (independent of the direction of rotation) separately for H.P.-Pump and heating, unloader safety-valve c/w infinitely variable pressure and quantity regulation, 4 large rubber wheels for rough terrain, with a patented wheel brake 2-way, storage possibility for all accessories, integrated diesel-tank 25l, integrated detergent-tank 20l, robust rotary on-off switch, 7,5m connection cable, removable ergonomic drawbar</p>			
Art. No.		496001	496002