
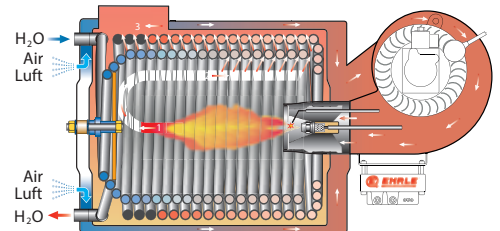


High pressure cleaner

Hot water, mobile, oil heated - series Etronic II
HD940

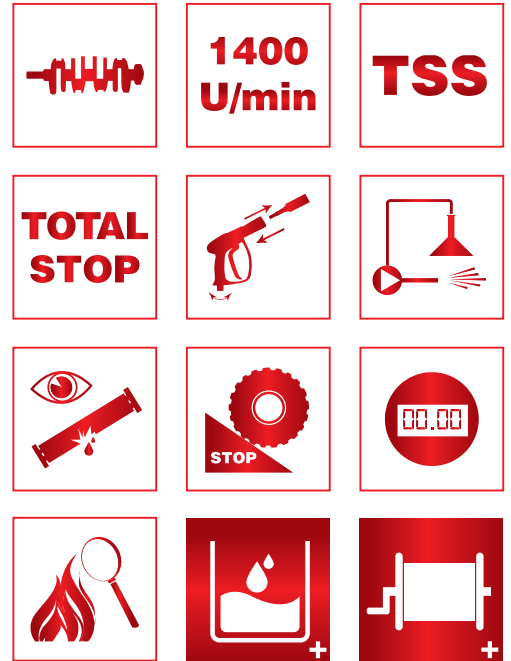

Type	HD940-Standard		HD940-Premium
Voltage	3/400-415V/ 50Hz		<ul style="list-style-type: none"> ▶ Etronic II - Controls ▶ Hose-Reel ▶ 20m HP-Hose DN08 - 315bar ▶ Trigger-Gun with swivel ▶ Spray-Lance 900mm c/w Nozzle- Protection ▶ Stainless-Steel Jet-Nozzle 25° ▶ Water-Supply separation acc. water reg. ▶ Chemical supply in high-pressure Jet c/w Metering-valve
Operating pressure	30-190bar/ 3-19MPa		
Max. pressure	210bar/ 21MPa		
Discharge capacity	300 - 840l/h		
Nozzle size	045		
Hot water capacity	30 - 98°C (150°C)		
Pump speed	1400rpm		
Connected load	5,4kW / 10,1A		
Electrical protection	3x16A slow-blowing		
Weight net / with package	159 kg / 180 kg	168 kg / 189 kg	
Dimensions device / with package (LxWxH)	1070x735x1020 mm / 1160x770x960 mm	1070x735x1310 mm / 1160x770x1350 mm	
<p>Robust, corrosion-resistant, self-supporting device chassis, impact-resistant device-cover made of ABS, triplex-piston pump with nickel plated, high-performance ceramic piston, stainless-steel valves, leakage-return, Etronic II - controls: (Start-stop system with switch-off delay, total-switch-off after 20min, OPH-counter with service information, low-water cut-off, low-fuel cut-off, optical flame monitoring with photoelectric cell and fault indicator-light, steam-stage) 2 motors system (independent of the direction of rotation) separately for H.P.-Pump and heating, unloader safety-valve c/w Infinitely variable pressure and quantity regulation, 4 large rubber wheels for rough terrain, with a patented wheel brake 2-way, storage possibility for all accessories, integrated diesel-tank 25l, integrated detergent-tank 20l, robust rotary on-off switch, 7,5m connection cable, removable ergonomic drawbar</p>			
Art. No.	442001	442002	