


ML CMP



Holding metal plate to protect By Pass valve from mechanical stress.

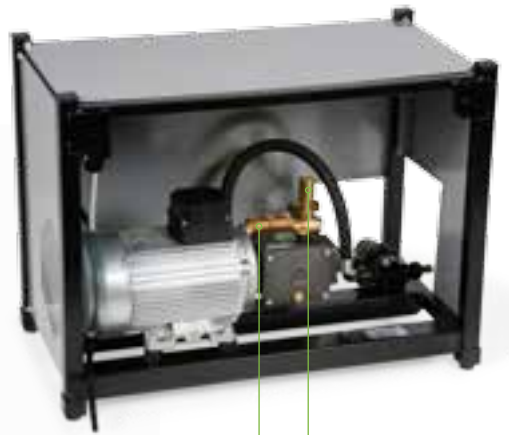

By Pass valve with pressure/flow regulation.



H.P. flexible hose 10 m
Code TBAP 25324



Handgrip
Code IPIP 40006



Lance Inox 70 cm
Code LCLC 40004



Nozzle for lance
Code UGLN 49990 (IDAF 40360 - 40486)
Code UGLN 49991 (IDAF 40361 - 40535)
Code UGLN 49987 (IDAF 40362 - 40536 - IDAF 40363 - 40537)



New IPC H.P. plunger pump with brass head and three ceramic pistons.



4 pole asynchronous motor for the models MLC-C 1310P M e MLC-C 1915P T. 2 pole asynchronous motor for the model MLC-C 1813P T.



General switch with thermal protection.



High capacity inlet water filter.



Easy access to all components for an easy maintenance.

Technical characteristics

MLC-C

- General switch with thermal protection.
- REMOTE CONTROL: By Pass (IDAF 40360 ÷ IDAF 40363) - Delayed Total Stop (IDAF 40486 ÷ IDAF 40537)
- FILTER: High capacity inlet water filter.
- THERMOSTATIC VALVE to protect the pump from over temperature while left in By Pass phase. (By Pass model)

- Epoxy polyester powder coated tubular frame.
- It can be fixed to the floor or a bad plate.
- Superposing structure up to 4 models without the need of other accessories.

| Code | Model | Remote control | Pressure Max (bar/MPa) | Flow Rate Max (l/h) | Max inlet water temperature (°C) | Main Supply (Ph-V-Hz-A) | Absorbed Power Max (kW) | Motor Speed (rpm) | Weight (Kg) | Dimensions (cm) |
|------------|----------------|----------------|------------------------|---------------------|----------------------------------|-------------------------|-------------------------|-------------------|-------------|-----------------|
| IDAF 40360 | MLC-C 1310P M | By Pass | 30÷130/3÷13 | 600 | 50 | 1-230-50-12,1 | 2,9 | 1450 | 48,8 | 71x39x55 |
| IDAF 40361 | MLC-C 1813P T | By Pass | 30÷180/3÷18 | 800 | 50 | 3-400-50-8,5 | 5,1 | 2800 | 48,8 | 71x39x55 |
| IDAF 40362 | MLC-C 1915P T | By Pass | 30÷190/3÷19 | 900 | 50 | 3-400-50-9,5 | 6,5 | 1450 | 55 | 71x39x55 |
| IDAF 40363 | MLC-C 2117P T | By Pass | 30÷200/3÷20 | 1000 | 50 | 3-400-50-12,0 | 7,5 | 1450 | 67 | 71x39x55 |
| IDAF 40486 | MLC-C D1310P M | Total Stop D | 30÷130/3÷13 | 600 | 50 | 1-230-50-12,1 | 2,9 | 1450 | 48,8 | 71x39x55 |
| IDAF 40535 | MLC-C D1813P T | Total Stop D | 30÷180/3÷18 | 800 | 50 | 3-400-50-8,5 | 5,1 | 2800 | 48,8 | 71x39x55 |
| IDAF 40536 | MLC-C D1915P T | Total Stop D | 30÷190/3÷19 | 900 | 50 | 3-400-50-9,5 | 6,5 | 1450 | 55 | 71x39x55 |
| IDAF 40537 | MLC-C D2117P T | Total Stop D | 30÷200/3÷20 | 1000 | 50 | 3-400-50-12,0 | 7,5 | 1450 | 67 | 71x39x55 |

Recommended optional accessories



Hose couplings
Code RCIN 10810



Hose reel kit
Code KTRI 37674



Hose reel kit
Code AVTB 39119



Rotating arm
Code KTRI 28914



Foam Head
Code LCPR 40039

