



High pressure cleaner

Hot water, mobile, electric heated - series HDE
HDE840 12 kW

Tel: 01748 826 200

Email: sales@tandjcleaningequipment.co.uk




Type	HDE840 12kW-Standard		HDE840 12kW-Premium	
Voltage	3/400-415V/ 50Hz		▶ Etronic II - Controls	
Operating pressure	30-140bar/ 3-14MPa		▶ 10m HP-Hose DN08 - 315bar	
Max. pressure	160bar/ 16MPa		▶ Trigger-Gun with swivel	
Discharge capacity	300 - 720l/h		▶ Spray-Lance 900mm c/w Nozzle- Protection	
Nozzle size	045		▶ Stainless-Steel Jet-Nozzle 25°	
Heating capacity	12kW		▶ Water-Supply separation acc. water reg.	
Hot water capacity	30 - 80°C		▶ Chemical supply in high-pressure Jet c/w Metering-valve	
Pump speed	1400rpm		▶ Etronic II - Controls	
Connected load	16,8kW / 26,2A		▶ Hose-Reel	
Electrical protection	3x32A slow-blowing		▶ 20m HP-Hose DN08 - 315bar	
Weight net / with package	119 kg / 140 kg		▶ Trigger-Gun with swivel	
Dimensions device / with package (LxWxH)	1070 x 735 x 785 mm / 1160 x 770 x 960 mm		▶ Spray-Lance 900mm c/w Nozzle- Protection	
Robust, corrosion-resistant, self-supporting device chassis, impact-resistant device-cover made of ABS, stainless-steel hotwater r-boiler with 65l capacity with pre-heating and buffer storage for immediate hot-water use and hot-water preparation during stand-by operation, triplex-piston pump with chrome nickel pump head (hot-water resistant), high-performance ceramic piston, stainless-steel valves, leakage-return, Etronic II - controls: (start-stop system with switch-off delay, stand-by system for heating, low-water cut-off), unloader safety-valve c/w Infinitely variable pressure and quantity regulation, 4 large rubber wheels for rough terrain, with a patented wheel brake 2-way, storage possibility for all accessories, 2 integrated detergent-tank with 20l capacity, 2-stage rotary on-off switch with stand-by function, 7,5m connection cable, removable ergonomic drawbar				
Art. No.	106001		106002	

High pressure cleaner

Hot water, mobile, electric heated - series HDE

HDE840 18 kW

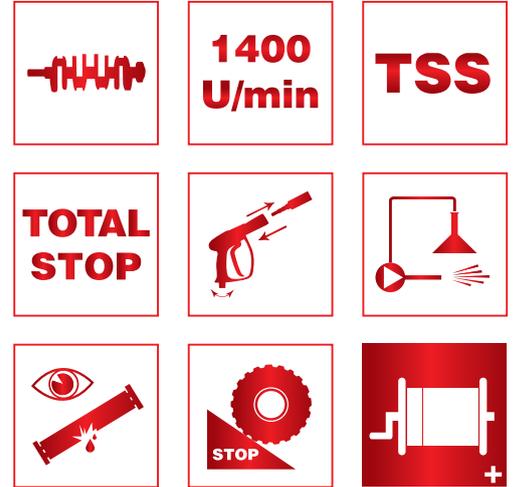



Type	HDE840 18kW-Standard		HDE840 18kW-Premium	
Voltage	3/400-415V/ 50Hz		▶ Etronic II - Controls	
Operating pressure	30-140bar/ 3-14MPa		▶ Hose-Reel	
Max. pressure	160bar/ 16MPa		▶ 20m HP-Hose DN08 - 315bar	
Discharge capacity	300 - 720l/h		▶ Trigger-Gun with swivel	
Nozzle size	045		▶ Spray-Lance 900mm c/w Nozzle- Protection	
Heating capacity	18kW		▶ Stainless-Steel Jet-Nozzle 25°	
Hot water capacity	30 - 80°C		▶ Water-Supply separation acc. water reg.	
Pump speed	1400rpm		▶ Chemical supply in high-pressure Jet c/w Metering-valve	
Connected load	22,8kW / 35,2A		▶ Stainless-Steel Jet-Nozzle 25°	
Electrical protection	3x50A slow-blowing		▶ Spray-Lance 900mm c/w Rotary-Nozzle	
Weight net / with package	121 kg / 142 kg		▶ Water-Supply separation acc. water reg.	
Dimensions device / with package (LxWxH)	1070x 735 x 785 mm / 1160x 770 x 960 mm		▶ Chemical supply in high-pressure Jet c/w Metering-valve	
<p>Robust, corrosion-resistant, self-supporting device chassis, impact-resistant device-cover made of ABS, stainless-steel hotwater r-boiler with 65l capacity with pre-heating and buffer storage for immediate hot-water use and hot-water preparation during stand-by operation, triplex-piston pump with chrome nickel pump head (hot-water resistant), high-performance ceramic piston, stainless-steel valves, leakage-return, Etronic II - controls: (start-stop system with switch-off delay, stand-by system for heating, low-water cut-off), unloader safety-valve c/w infinitely variable pressure and quantity regulation, 4 large rubber wheels for rough terrain, with a patented wheel brake 2-way, storage possibility for all accessories, 2 integrated detergent-tank with 20l capacity, 2-stage rotary on-off switch with stand-by function, 7,5m connection cable, removable ergonomic drawbar</p>				
Art. No.	107001		107002	

High pressure cleaner

Hot water, mobile, electric heated - series HDE
HDE840 24kW

Tel: 01748 826 200

Email: sales@tandjcleaningequipment.co.uk




Type	HDE840 24kW-Standard		HDE840 24kW-Premium	
Voltage	3/400-415V/ 50Hz		▶ Etronic II - Controls	
Operating pressure	30-140bar/ 3-14MPa		▶ 10m HP-Hose DN08 - 315bar	
Max. pressure	160bar/ 16MPa		▶ Trigger-Gun with swivel	
Discharge capacity	300 - 720l/h		▶ Spray-Lance 900mm c/w Nozzle- Protection	
Nozzle size	045		▶ Stainless-Steel Jet-Nozzle 25°	
Heating capacity	24kW		▶ Water-Supply separation acc. water reg.	
Hot water capacity	30 - 80°C		▶ Chemical supply in high-pressure Jet c/w Metering-valve	
Pump speed	1400rpm		▶ Etronic II - Controls	
Connected load	28,8kW / 44A		▶ Hose-Reel	
Electrical protection	3x50A slow-blowing		▶ 20m HP-Hose DN08 - 315bar	
Weight net / with package	124 kg / 145 kg		▶ Trigger-Gun with swivel	
Dimensions device / with package (LxWxH)	1070 x 735 x 785 mm / 1160 x 770 x 960 mm		▶ Spray-Lance 900mm c/w Nozzle- Protection	
<p>Robust, corrosion-resistant, self-supporting device chassis, impact-resistant device-cover made of ABS, stainless-steel hotwater r-boiler with 65l capacity with pre-heating and buffer storage for immediate hot-water use and hot-water preparation during stand-by operation, triplex-piston pump with chrome nickel pump head (hot-water resistant), high-performance ceramic piston, stainless-steel valves, leakage-return, Etronic II - controls: (start-stop system with switch-off delay, stand-by system for heating, low-water cut-off), unloader safety-valve c/w infinitely variable pressure and quantity regulation, 4 large rubber wheels for rough terrain, with a patented wheel brake 2-way, storage possibility for all accessories, 2 integrated detergent-tank with 20l capacity, 2-stage rotary on-off switch with stand-by function, 7,5m connection cable, removable ergonomic drawbar</p>				
Art. No.	108001		108002	

High pressure cleaner

Hot water, mobile, electric heated - series HDE


HDE840-F 24 kW – food version, hot water resistant



**1400
U/min**

TSS

**TOTAL
STOP**



INOX

Gerätetyp	HDE840-F 24kW-Standard		HDE840-F 24kW-Premium	
Voltage	3/400-415V/ 50Hz			
Operating pressure	30-140bar/ 3-14MPa			
Max. pressure	160bar/ 16MPa			
Discharge capacity	300 - 720l/h			
Nozzle size	045			
Heating capacity	24kW			
Hot water capacity	30 - 80°C			
Pump speed	1400U/min			
Connected load	28,8kW / 44A			
Electrical protection	3x50A träge			
Weight net / with package	124 kg / 145 kg		133 kg / 154 kg	
Dimensions device / with package (LxWxH)	1070x 735 x 785 mm / 1160x 770x 960 mm		1070x 735 x 1310 mm / 1160x 770x 1350 mm	
<p>Food appliance with abrasion resistant high pressure hose blue, self-supporting, robust, corrossions free, rotation-moulded dev ice-chassis for food industry, stainless steel, impact-resistant device-cover made of ABS, stainless-steel hotwater-boiler with 65l capacity with pre-heating and buffer storage for immediate hot-water use and hot-water preparation during stand-by operation. Triplex-piston pump with chrome nickel pump head (hot-water resistant), high-performance ceramic piston, stainless-steel valves, leakage-return, Etronic II - controls: (start-stop system with switch-off delay, stand-by system for heating, low-water cut-off), unloader safety-valve c/w Infinitely variable pressure and quantity regulation, 4 large rubber wheels for rough terrain, with a patented wheel brake 2-way, storage possibility for all accessories, 2 integrated detergent-tank with 20l capacity, 2-stage rotary on-off switch with stand-by function, 7,5m connection cable, removable ergonomic drawbar stainless steel</p>				
Artikel-Nr.	108003		108004	