

# High pressure cleaner

Hot water, stationary, oil heated - series HSC

HSC823

Tel: 01748 826 200

Email: sales@tandjcleaningequipment.co.uk




**INOX**

Type	HSC823		HSC823-INOX
Voltage	1/ 230V / 50Hz	<ul style="list-style-type: none"> <li>▶ Etronic II - Controls</li> <li>▶ 10m HP-Hose DN08 - 315bar</li> <li>▶ Trigger-Gun with swivel</li> <li>▶ Spray-Lance 900mm c/w Nozzle- Protection</li> <li>▶ Stainless-Steel Jet-Nozzle 25°</li> <li>▶ Water-Supply separation acc. water reg.</li> <li>▶ Chemical supply in high-pressure Jet c/w Metering-valve</li> </ul>	<ul style="list-style-type: none"> <li>▶ Stainless steel (food safe)</li> <li>▶ Etronic II - Controls</li> <li>▶ 10m HP-Hose DN08 - 315bar</li> <li>▶ Trigger-Gun with swivel</li> <li>▶ Spray-Lance 900mm c/w Nozzle- Protection</li> <li>▶ Stainless-Steel Jet-Nozzle 25°</li> <li>▶ Water-Supply separation acc. water reg.</li> <li>▶ Chemical supply in high-pressure Jet c/w Metering-valve</li> </ul>
Operating pressure	30-140bar/ 3-14MPa		
Max. pressure	150bar/ 15MPa		
Discharge capacity	300 - 720l/h		
Nozzle size	045		
Hot water capacity	30 - 98°C		
Pump speed	1400rpm		
Connected load	3,0kW / 13A		
Electrical protection	16A slow-blowing		
Weight net / with package	301 kg / 318 kg		300 kg / 317 kg
Dimensions device / with package (LxWxH)	1220x755x1625 mm/ 1250x815x1755 mm		1220x755x1625 mm/ 1250x815x1755 mm
<p>Self-supporting, robust, device-chassis made from galvanized steel and powder-coated (option INOX: device-chassis made out of stainless-steel), suitable for floor installation, triplex-piston pump with brass pump head, nickel plated, high-performance ceramic piston, stainless-steel valves, leakage-return, Etronic II - controls: (start-stop system with switch-off delay, total-switch-off after 20min, OPH-counter with service information, optical flame monitoring with photoelectric cell and fault indicator-light) 2 motors system (independent of the direction of rotation) separately for H.P.-Pump and heating, unloader safety-valve c/w Infinitely variable pressure and quantity regulation, integrated diesel-tank 60l, separate space for 2 x 20l cleaning detergent-container c/w Remote activation, 2 different operating control level, 3 robust on-off rotary switches for H.P. Pump, heating and detergent, 7,5m connection cable</p>			
Art. No.	52601		526010

# High pressure cleaner

Hot water, stationary, electric heated - series HSC

HSC840-INOX 24kW

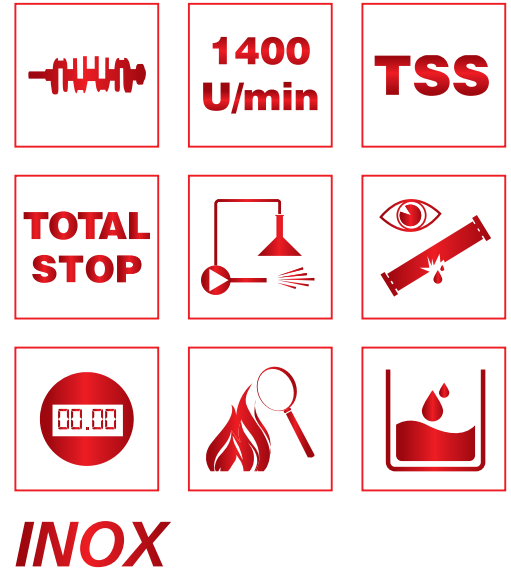

Type		HSC840-INOX 24kW
Voltage	3/400-415V/ 50Hz	<ul style="list-style-type: none"><li>▶ Stainless steel (food safe)</li><li>▶ Etronic II - Controls</li><li>▶ 10m HP-Hose DN08 - 315bar</li><li>▶ Trigger-Gun with swivel</li><li>▶ Spray-Lance 900mm c/w Nozzle Protection</li><li>▶ Stainless-Steel Jet-Nozzle 25°</li><li>▶ Water-Supply separation acc. water reg.</li><li>▶ Chemical supply in high-pressure Jet c/w Metering-valve</li></ul>
Operating pressure	30-130bar/ 3-13MPa	
Max. pressure	150bar/ 15MPa	
Discharge capacity	300 - 720l/h	
Nozzle size	045	
Heating capacity	24kW	
Hot water capacity	30 - 80°C	
Pump speed	1400rpm	
Connected load	28,8kW / 44,2A	
Electrical protection	3x50A slow-blowing	
Weight net / with package		264 kg / 281 kg
Dimensions device / with package (LxWxH)		1220x755x1625 mm/ 1250x815x1755 mm
<p>Self-supporting, robust, device-chassis made out of stainless-steel, suitable for floor installation, stainless-steel hotwater-boiler with 65l capacity with pre-heating and buffer storage for immediate hot-water use and hot-water preparation during stand-by operation.,triplex-piston pump with chrome nickel pump head (hot-water resistant), high-performance ceramic piston, stainless-steel valves, leakage-return, Et ronic II - cont-rols: (start-stop system with switch-off delay, stand-by system for heating, OPH-counter with service information, low-water cut-off), unloader safety-valve c/w Infinitely variable pressure and quantity regulation, seperate space for 2 x 20l cleaning detergent-container c/w remote activation, 2 different operating control level, 3 robust on-off rotary switches for H.P. pump, heating and detergent, 7,5m connection cable</p>		
Art. No.		531

# High pressure cleaner

Hot water, stationary, oil heated - series HSC

HSC1140



Type	HSC1140		HSC1140-INOX
Voltage	3/400-415V/ 50Hz	<ul style="list-style-type: none"> <li>▶ Etronic II - Controls</li> <li>▶ 10m HP-Hose DN08 - 315bar</li> <li>▶ Trigger-Gun with swivel</li> <li>▶ Spray-Lance 900mm c/w Nozzle- Protection</li> <li>▶ Stainless-Steel Jet-Nozzle 25°</li> <li>▶ Water-Supply separation acc. water reg.</li> <li>▶ Chemical supply in high-pressure Jet c/w Metering-valve</li> </ul>	<ul style="list-style-type: none"> <li>▶ Stainless steel (food safe)</li> <li>▶ Etronic II - Controls</li> <li>▶ 10m HP-Hose DN08 - 315bar</li> <li>▶ Trigger-Gun with swivel</li> <li>▶ Spray-Lance 900mm c/w Nozzle- Protection</li> <li>▶ Stainless-Steel Jet-Nozzle 25°</li> <li>▶ Water-Supply separation acc. water reg.</li> <li>▶ Chemical supply in high-pressure Jet c/w Metering-valve</li> </ul>
Operating pressure	30-180bar/ 3-18MPa		
Max. pressure	200bar/ 20MPa		
Discharge capacity	300 - 1000l/h		
Nozzle size	055		
Hot water capacity	30 - 98°C		
Pump speed	1400rpm		
Connected load	6,5kW / 11,7A		
Electrical protection	3x16A slow-blowing		
Weight net / with package	301 kg / 318 kg		300 kg / 317 kg
Dimensions device / with package (LxWxH)	1220x755x1625 mm / 1250x815x1755 mm		1220x755x1625 mm / 1250x815x1755 mm
<p>Self-supporting, robust, device-chassis made from galvanized steel and powder-coated (option INOX: device-chassis made out of stainless-steel), suitable for floor installation, triplex-piston pump with brass pump head, nickel plated, high-performance ceramic piston, stainless-steel valves, leakage-return, Etronic II - controls: (start-stop system with switch-off delay, total-switch-off after 20min, OPH-counter with service information, optical flame monitoring with photoelectric cell and fault indicator-light) 2 motors system (independent of the direction of rotation) separately for H.P.-Pump and heating, unloader safety-valve c/w Infinitely variable pressure and quantity regulation, integrated diesel-tank 60l, separate space for 2 x 20l cleaning detergent-container c/w Remote activation, 2 different operating control level, 3 robust on-off rotary switches for H.P. Pump, heating and detergent, 7,5m connection cable</p>			
Art. No.	52702		527

# High pressure cleaner

Hot water, stationary, electric heated - series HSC

HSC1140-INOX 30kW



Type		HSC-INOX 1140 30kW
Voltage	3/400-415V/ 50Hz	<ul style="list-style-type: none"><li>▶ Stainless steel (food safe)</li><li>▶ Etronic II - Controls</li><li>▶ 10m HP-Hose DN08 - 315bar</li><li>▶ Trigger-Gun with swivel</li><li>▶ Spray-Lance 900mm c/w Nozzle Protection</li><li>▶ Stainless-Steel Jet-Nozzle 25°</li><li>▶ Water-Supply separation acc. water reg.</li><li>▶ Chemical supply in high-pressure Jet c/w Metering-valve</li></ul>
Operating pressure	30-180bar/ 3-18MPa	
Max. pressure	200bar/ 20MPa	
Discharge capacity	300 - 1000l/h	
Nozzle size	055	
Heating capacity	30kW	
Hot water capacity	30 - 80°C	
Pump speed	1400rpm	
Connected load	36,5kW / 57,0A	
Electrical protection	3x63A slow-blowing	
Weight net / with package		292 kg / 309 kg
Dimensions device / with package (LxWxH)		1220x755x1625 mm/ 1250x815x1755 mm
Self-supporting, robust, device-chassis made out of stainless-steel, suitable for floor installation, stainless-steel hotwater-boiler with 65l capacity with pre-heating and buffer storage for immediate hot-water use and hot-water preparation during stand-by operation triplex-piston pump with chrome nickel pump head (hot-water resistant), high-performance ceramic piston, stainless-steel valves, leakage-return, Et ronic II - controls: (start-stop system with switch-off delay, stand-by system for heating, OPH-counter with service information, low-water cut-off), unloader safety-valve c/w infinitely variable pressure and quantity regulation, separate space for 2 x 20l cleaning detergent-container c/w Remote activation, 2 different operating control level, 3 robust on-off rotary switches for H.P. Pump, heating and detergent, 7,5m connection cable		
Art. No.		533



# High pressure cleaner

Hot water, stationary, gas heating - series HSC  
HSC1140-INOX Gas

Tel: 01748 826 200

Email: sales@tandjcleaningequipment.co.uk




Type		HSC-II	Gas
Voltage	3/400-415V/ 50Hz	<ul style="list-style-type: none"><li>▶ Stainless steel (food safe)</li><li>▶ Etronic II - Controls</li><li>▶ 10m HP-Hose DN08 - 315bar</li><li>▶ Trigger-Gun with swivel</li><li>▶ Spray-Lance 900mm c/w Nozzle Protection</li><li>▶ Stainless-Steel Jet-Nozzle 25°</li><li>▶ Water-Supply separation acc. water reg.</li><li>▶ Chemical supply in high-pressure Jet c/w Metering-valve</li></ul>	
Operating pressure	30-180bar/ 3-18MPa		
Max. pressure	200bar/ 20MPa		
Discharge capacity	300 - 1000l/h		
Nozzle size	055		
Hot water capacity	30 - 70°C		
Pump speed	1400rpm		
Heating power	50kW		
Connected load	6,5kW / 11,7A		
Electrical protection	3x16A träge		
Weight net / with package		313 kg / 330 kg	
Dimensions device / with package (LxWxH)		1220x755x1625 mm/ 1250x815x1755 mm	
<p>Self-supporting, robust, device-chassis made out of stainless-steel, suitable for floor installation, stainless-steel hotwater-boiler with 65l capacity with pre-heating and buffer storage for immediate hot-water use and hot-water preparation during stand-by operation, triplex-piston pump with chrome nickel pump head (hot-water resistant), high-performance ceramic piston, stainless-steel valves, leakage-return, Etronic II - controls: (start-stop system with switch-off delay, stand-by system for heating, OPH-counter with service information, low-water cut-off), unloader safety-valve c/w infinitely variable pressure and quantity regulation, seperatee space for 2 x 20l cleaning detergent-container c/w remote activation, 2 different operating control level, 3 robust on-off rotary switches for H.P. Pump, heating and detergent, 7,5m connection cable</p>			
Art. No.		52701	

# High pressure cleaner

Hot water, stationary, oil heated - series HSC  
HSC1240

Tel: 01748 826 200

Email: sales@tandjcleaningequipment.co.uk

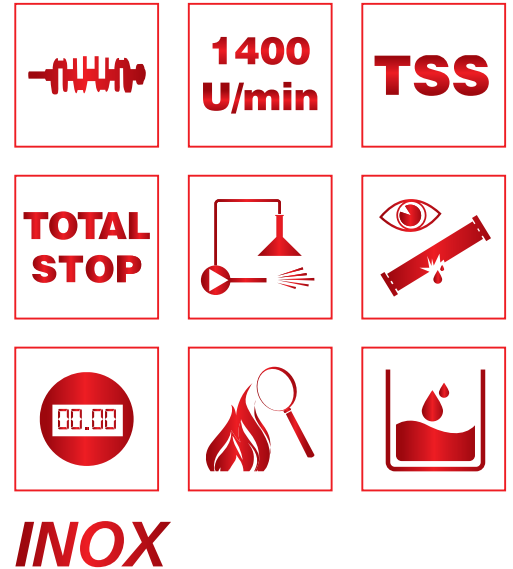

Type		HSC1240	HSC1240-INOX
Voltage	3/400-415V/ 50Hz	<ul style="list-style-type: none"><li>▶ Etronic II - Controls</li><li>▶ 10m HP-Hose DN08 - 315bar</li><li>▶ Trigger-Gun with swivel</li><li>▶ Spray-Lance 900mm c/w Nozzle- Protection</li><li>▶ Stainless-Steel Jet-Nozzle 25°</li><li>▶ Water-Supply separation acc. water reg.</li><li>▶ Chemical supply in high-pressure Jet c/w Metering-valve</li></ul>	<ul style="list-style-type: none"><li>▶ Stainless steel (food safe)</li><li>▶ Etronic II - Controls</li><li>▶ 10m HP-Hose DN08 - 315bar</li><li>▶ Trigger-Gun with swivel</li><li>▶ Spray-Lance 900mm c/w Nozzle- Protection</li><li>▶ Stainless-Steel Jet-Nozzle 25°</li><li>▶ Water-Supply separation acc. water reg.</li><li>▶ Chemical supply in high-pressure Jet c/w Metering-valve</li></ul>
Operating pressure	30-160bar/ 3-16MPa		
Max. pressure	180bar/ 18MPa		
Discharge capacity	300 - 1200l/h		
Nozzle size	070		
Hot water capacity	30 - 98°C		
Pump speed	1400rpm		
Connected load	7,6kW / 14,1A		
Electrical protection	3x16A slow-blowing		
Weight net / with package		301 kg / 318 kg	300 kg / 317 kg
Dimensions device / with package (LxWxH)		1220x755x1625 mm/ 1250x815x1755 mm	1220x755x1625 mm/ 1250x815x1755 mm
Self-supporting, robust, device-chassis made from galvanized steel and powder-coated (option INOX: device-chassis made out of stainless-steel), suitable for floor installation, triplex-piston pump with brass pump head, nickel plated, high-performance ceramic piston, stainless-steel valves, leakage-return,Etronic II - controls: (start-stop system with switch-off delay, total-switch-off after 20min, OPH-counter with service information, optical flame monitoring with photoelectric cell and fault indicator-light) 2 motors system (independent of the direction of rotation) separately for H.P.-Pump and heating, unloader safety-valve c/w Infinitely variable pressure and quantity regulation, integrated diesel-tank 60l, separate space for 2 x 20l cleaning detergent-container c/w Remote activation, 2 different operating control level, 3 robust on-off rotary switches for H.P. Pump, heating and detergent, 7,5m connection cable			
Art. No.		52801	528