


# High pressure cleaner

Cold water, stationary - series KS

KS1140 - hot water resistant

**T&J CLEANING EQUIPMENT**

Call 01748 826 200

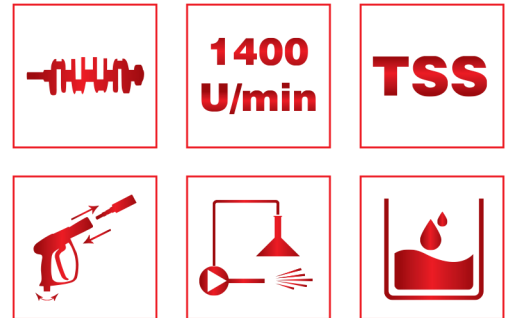

**INOX**

Type		KS1140	KS1140-INOX
Voltage	3/400-415V/ 50Hz	▶ 10m HP-Hose DN08 - 315bar	▶ Stainless Steel (Food-Safe)
Operating pressure	30-180bar/ 3-18MPa	▶ Trigger-Gun with swivel	▶ 10m HP-Hose DN08 - 315bar
Max. pressure	200bar/ 20MPa	▶ Spray-Lance 900mm c/w Nozzle- Protection	▶ Trigger-Gun with swivel
Discharge capacity	300 - 1000l/h	▶ Stainless-Steel Jet-Nozzle 25°	▶ Spray-Lance 900mm c/w Nozzle- Protection
Nozzle size	055	▶ 4l Water-Storage tank	▶ Stainless-Steel Jet-Nozzle 25°
Max. Inlet temperature	80°C	▶ Water-Supply separation acc. water reg.	▶ 4l Water-Storage tank
Pump speed	1400rpm	▶ Chemical supply in high-pressure Jet c/w Metering-valve	▶ Water-Supply separation acc. water reg.
Connected load	6,5kW / 11,7A		▶ Chemical supply in high-pressure Jet c/w Metering-valve
Electrical protection	3x16A slow-blowing		
Weight net / with package		112 kg / 126 kg	112 kg / 126 kg
Dimensions device / with package (LxWxH)		780 x 510 x 540 mm / 1200 x 800 x 700 mm	780 x 510 x 540 mm / 1200 x 800 x 700 mm
Self-supporting, robust, device-chassis made from galvanized steel and powder-coated (option INOX: device-chassis made out of stainless-steel), wall-bracket, drawable technic-tablar on telescopic rails, triplex-piston pump with brass pump head, hot-water resistant up to 80°C, high-performance ceramic piston, stainless-steel valves, leakage-return, start-stop system with switch-off delay, total-switch-off after 20min with leakage-recognition, unloader safety-valve c/w Infinitely variable pressure and quantity regulation, robust rotary on-off switch, 7,5m connection cable			
Art. No.		155	155000