


High pressure cleaner

Hot water, stationary, oil heated - series HSC

HSC1140

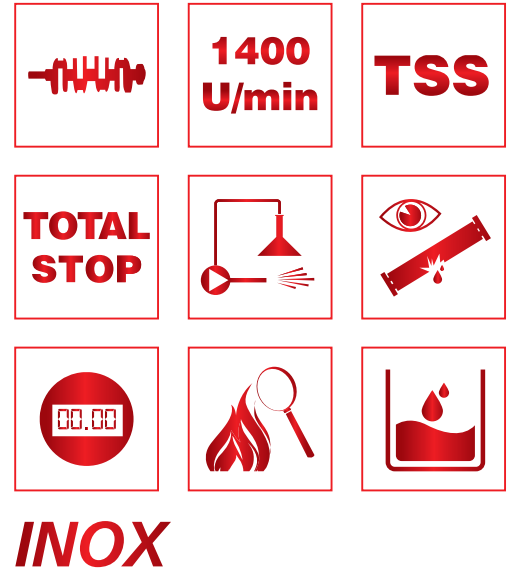

| Type | HSC1140 | | HSC1140-INOX |
|---|-------------------------------------|--|---|
| Voltage | 3/400-415V/ 50Hz | | ▶ Stainless steel (food safe) |
| Operating pressure | 30-180bar/ 3-18MPa | | ▶ Etronic II - Controls |
| Max. pressure | 200bar/ 20MPa | | ▶ 10m HP-Hose DN08 - 315bar |
| Discharge capacity | 300 - 1000l/h | | ▶ Trigger-Gun with swivel |
| Nozzle size | 055 | | ▶ Spray-Lance 900mm c/w Nozzle- Protection |
| Hot water capacity | 30 - 98°C | | ▶ Stainless-Steel Jet-Nozzle 25° |
| Pump speed | 1400rpm | | ▶ Water-Supply separation acc. water reg. |
| Connected load | 6,5kW / 11,7A | | ▶ Chemical supply in high-pressure Jet c/w Metering-valve |
| Electrical protection | 3x16A slow-blowing | | ▶ Stainless-Steel Jet-Nozzle 25° |
| Weight net / with package | 301 kg / 318 kg | | ▶ Water-Supply separation acc. water reg. |
| Dimensions device / with package (LxWxH) | 1220x755x1625 mm / 1250x815x1755 mm | | ▶ Chemical supply in high-pressure Jet c/w Metering-valve |
| <p>Self-supporting, robust, device-chassis made from galvanized steel and powder-coated (option INOX: device-chassis made out of stainless-steel), suitable for floor installation, triplex-piston pump with brass pump head, nickel plated, high-performance ceramic piston, stainless-steel valves, leakage-return, Etronic II - controls: (start-stop system with switch-off delay, total-switch-off after 20min, OPH-counter with service information, optical flame monitoring with photoelectric cell and fault indicator-light) 2 motors system (independent of the direction of rotation) separately for H.P.-Pump and heating, unloader safety-valve c/w infinitely variable pressure and quantity regulation, integrated diesel-tank 60l, separate space for 2 x 20l cleaning detergent-container c/w Remote activation, 2 different operating control level, 3 robust on-off rotary switches for H.P. Pump, heating and detergent, 7,5m connection cable</p> | | | |
| Art. No. | 52702 | | 527 |

High pressure cleaner


Hot water, stationary, electric heated - series HSC

HSC1140-INOX 30kW



**1400
U/min**

TSS



INOX

| | | |
|--|--|---|
| Type | HSC-INOX 1140 30kW | |
| Voltage | 3/400-415V/ 50Hz | <ul style="list-style-type: none"> ▶ Stainless steel (food safe) ▶ Etronic II - Controls ▶ 10m HP-Hose DN08 - 315bar ▶ Trigger-Gun with swivel ▶ Spray-Lance 900mm c/w Nozzle Protection ▶ Stainless-Steel Jet-Nozzle 25° ▶ Water-Supply separation acc. water reg. ▶ Chemical supply in high-pressure Jet c/w Metering-valve |
| Operating pressure | 30-180bar/ 3-18MPa | |
| Max. pressure | 200bar/ 20MPa | |
| Discharge capacity | 300 - 1000l/h | |
| Nozzle size | 055 | |
| Heating capacity | 30kW | |
| Hot water capacity | 30 - 80°C | |
| Pump speed | 1400rpm | |
| Connected load | 36,5kW / 57,0A | |
| Electrical protection | 3x63A slow-blowing | |
| Weight net / with package | 292 kg / 309 kg | |
| Dimensions device / with package (LxWxH) | 1220x 755x 1625 mm / 1250x815x 1755 mm | |
| <p>Self-supporting, robust, device-chassis made out of stainless-steel, suitable for floor installation, stainless-steel hotwater-boiler with 65l capacity with pre-heating and buffer storage for immediate hot-water use and hot-water preparation during stand-by operation triplex-piston pump with chrome nickel pump head (hot-water resistant), high-performance ceramic piston, stainless-steel valves, leakage-return, Et ronic II - controls: (start-stop system with switch-off delay, stand-by system for heating, OPH-counter with service information, low-water cut-off), unloader safety-valve c/w infinitely variable pressure and quantity regulation, separate space for 2 x 20l cleaning detergent-container c/w Remote activation, 2 different operating control level, 3 robust on-off rotary switches for H.P. Pump, heating and detergent, 7,5m connection cable</p> | | |
| Art. No. | 533 | |

High pressure cleaner

Hot water, stationary, gas heating - series HSC
HSC1140-INOX Gas

Tel: 01748 826 200

Email: sales@tandjcleaningequipment.co.uk



INOX

| Type | HSC-II | Gas |
|--|-------------------------------------|---|
| Voltage | 3/400-415V/ 50Hz | ▶ Stainless steel (food safe) |
| Operating pressure | 30-180bar/ 3-18MPa | ▶ Etronic II - Controls |
| Max. pressure | 200bar/ 20MPa | ▶ 10m HP-Hose DN08 - 315bar |
| Discharge capacity | 300 - 1000l/h | ▶ Trigger-Gun with swivel |
| Nozzle size | 055 | ▶ Spray-Lance 900mm c/w Nozzle Protection |
| Hot water capacity | 30 - 70°C | ▶ Stainless-Steel Jet-Nozzle 25° |
| Pump speed | 1400rpm | ▶ Water-Supply separation acc. water reg. |
| Heating power | 50kW | ▶ Chemical supply in high-pressure Jet c/w Metering-valve |
| Connected load | 6,5kW / 11,7A | |
| Electrical protection | 3x16A träge | |
| Weight net / with package | 313 kg / 330 kg | |
| Dimensions device / with package (LxWxH) | 1220x755x1625 mm / 1250x815x1755 mm | |
| <p>Self-supporting, robust, device-chassis made out of stainless-steel, suitable for floor installation, stainless-steel hotwater-boiler with 65l capacity with pre-heating and buffer storage for immediate hot-water use and hot-water preparation during stand-by operation, triplex-piston pump with chrome nickel pump head (hot-water resistant), high-performance ceramic piston, stainless-steel valves, leakage-return, Etronic II - controls: (start-stop system with switch-off delay, stand-by system for heating, OPH-counter with service information, low-water cut-off), unloader safety-valve c/w infinitely variable pressure and quantity regulation, separate space for 2 x 20l cleaning detergent-container c/w remote activation, 2 different operating control level, 3 robust on-off rotary switches for H.P. Pump, heating and detergent, 7,5m connection cable</p> | | |
| Art. No. | 52701 | |